




慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED DATE

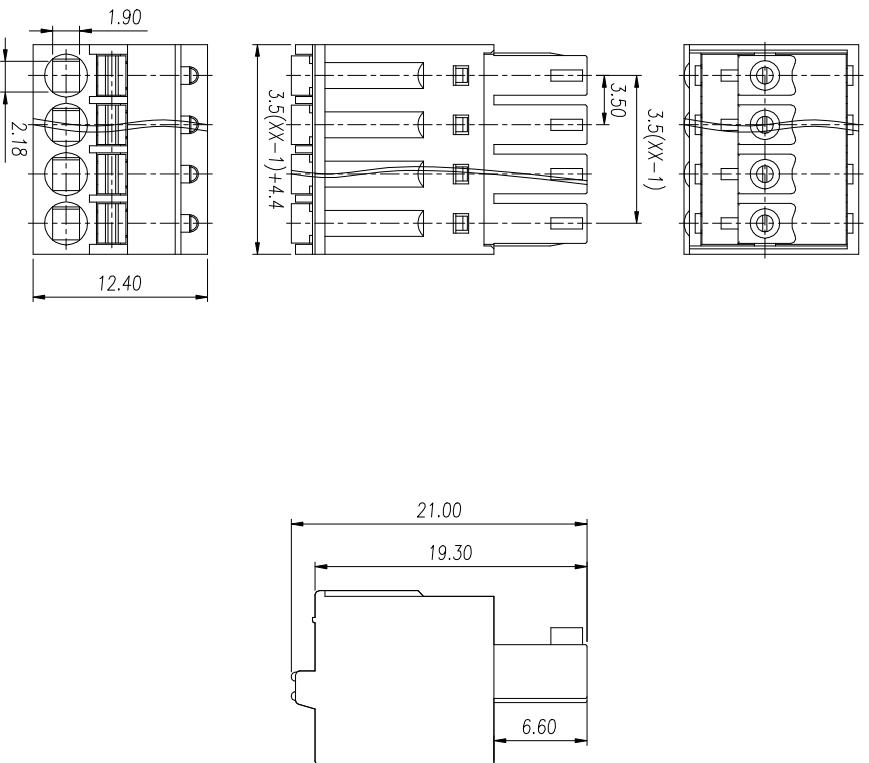

linear dimension (Tolerances Standard GB/T 14486-2008)	—	□	┌
variable range	over 6 to 10	over 10 to 30	over 30 to 60
tolerance	±0.20	±0.30	±0.50
	±0.70	±1.00	±1.30
	±1.60	0.10	0.30
		0.30	0.60

UL/CUL 技术参数

UL/CUL Technical Data	GWS®			
等级	Use Group	B	C	D
额定电压	Rated Voltage	N	300	-
额定电流	Rated Current	A	8	-
接线范围	Wire Range	28-16		
单/多芯线	Solid/Stranded	AWG		
耐压	Withstanding Voltage	1800V/1min		

IEC 技术参数

IEC Technical Data	GWS®			
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage	N	160	160
额定电流	Rated Current	A	8	8
额定冲击电压	Impulse withstand voltage	[kV]	2.5	2.5
导线截面积	Conductor cross section	[mm ²]	0.2-1.5	
硬质/柔性导线	Solid/flexible			

材料	Material
绝缘材料	Insulation Material
阻燃等级	Inflammability
导体材料	Contact Material
导体表面镀层	Contactive Coating

一般参数	Other Data
间距	Pitch
剥线长度	Stripping Length
螺丝	Screw/Torque
工作温度	Operating temperature
焊接温度	Soldering temperature
引脚尺寸	Pin Dimensions
PCB穿孔直径	PCB Hole Diameter

绝缘材料	PA66		
阻燃等级	UL94V-0		
导体材料	铜合金 Copper alloy		
导体表面镀层	镀锡锡 Sn Plated		
间距	Pitch	[mm]/[P]	3.5/02-24
剥线长度	Stripping Length	[mm]	7-8
螺丝	Screw/Torque	[N.m]	-
工作温度	Operating temperature	[°C]	-40-105
焊接温度	Soldering temperature		-
引脚尺寸	Pin Dimensions	[mm]	-
PCB穿孔直径	PCB Hole Diameter	[mm]	-

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	2:1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					
名称 / TITLE	第三视角 THIRD ANGLE PROJECTION				版本 / REV
					V0
	WJ15EDGKD-3.5-XXP-1YY-00A				